

SELECON

PRODUCT DATA SHEET



THEATRE FRESNEL

The Arena Theatre Fresnel is 2.0 / 2.5 kW luminaire using a 200mm diameter lens. The adjustable cone of light has a soft edge, easily blended with adjacent beams to provide even illumination. Fully featured luminaire constructed of pressure die-castings and aluminium extrusion.


The Arena Theatre Fresnel offers superior light output, strength and performance at a moderate cost.

FEATURES


- Wide range of beam angle from 7 to 60 degrees.
- Flat even beam with very little spill.
- Adjustable yoke balance point.
- 'Swing-down' door for easy access to lamp or cleaning. Isolates the mains supply when opened.
- Choice of GY16 lampbase for CP72/43 2.0kW lamp or G22 lampbase for CP91, 2.5kW.
- Smooth focus movement from 'Posi-slide' focus system, no metal to metal contact.
- NEW lead screw focus action
- Effective airflow maintains lower body temperature.
- Fully tested and compliant to CE standards.

PHOTOMETRIC DATA

Tests conducted using a standard CP91, 2500W, 240V, 65,600 lumens lamp.

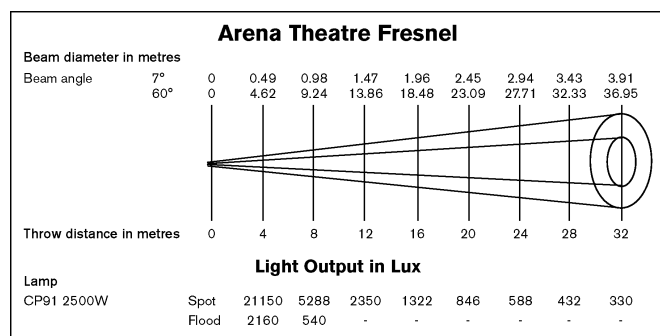

PHYSICAL DATA

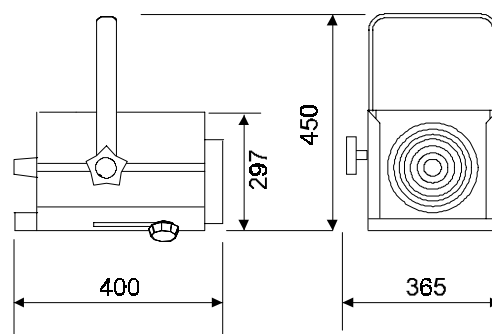

Weights:

Model	Unit incl c/frame	Unit incl c/frame packed
2kW	10.04kg	12.17kg
2.5kW	10.30kg	12.42kg

Carton Size: 310 x 375 x 520

Carton Size Cubic: 0.06

Colour Frame Size: 245mm square (DIN Std)

Included: 1 x colour frame, 1 x M12 suspension bolt set, instruction leaflet.

ORDER CODES & ACCESSORIES

Arena Th. Fresnel 2kW – posi-slide
10SF2020GY16

Arena Th. Fresnel 2kW – lead screw
10SF2020GT16LS

Arena Th. Fresnel 2.5kW – posi-slide
10SF2025G22

Arena Th. Fresnel 2.5kW – lead screw
10SF2025G22LS

Barndoor 20BDSF2020

Lens Safety Mesh 20SM24

Suspension Hookclamp 20HC

Safety Bond 20SC

Your Selecon Distributor

Selecon reserves the right to change the specifications without notice (05/02)